
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART # | STUD SIZE | | DIMENSIONS in. [mm] | | | | |
|---|---|---|---|---|---|---|---|
| | ENGLISH | METRIC | L ± .03 [0,8] | W ± .01 [0,3] | C ± .02 [0,5] | M ± .03 [0,8] | H ± .01 [0,3] |
| P14-4R | #4 | -- | .62 [15,8] | .25 [6,4] | .20 [5,1] | .50 [12,7] | .12 [3,1] |
| PM2-3R* | -- | M3 | .62 [15,8] | .23 [5,8] | .22 [5,6] | .50 [12,7] | .13 [3,3] |
| P14-6R | #6 | M3,5 | .62 [15,8] | .25 [6,4] | .20 [5,1] | .50 [12,7] | .15 [3,8] |
| P14-8R | #8 | M4 | .71 [18,0] | .31 [7,9] | .25 [6,4] | .55 [14,0] | .17 [4,3] |
| P14-10R | #10 | -- | .71 [18,0] | .31 [7,9] | .25 [6,4] | .55 [14,0] | .20 [5,1] |
| PM2-5R* | -- | M5 | .71 [18,0] | .35 [8,9] | .29 [7,4] | .55 [14,0] | .21 [5,3] |
| P14-14R | 1/4" | M6 | .91 [23,1] | .46 [11,7] | .38 [9,7] | .68 [17,3] | .27 [6,9] |
| P14-56R | 5/16" | M8 | .91 [23,1] | .46 [11,7] | .38 [9,7] | .68 [17,3] | .34 [8,6] |
| P14-38R | 3/8" | -- | 1.00 [25,4] | .53 [13,5] | .43 [10,9] | .73 [18,5] | .40 [10,2] |
| P14-12R | 1/2" | -- | 1.20 [30,5] | .72 [18,3] | .53 [13,5] | .84 [21,3] | .52 [13,2] |

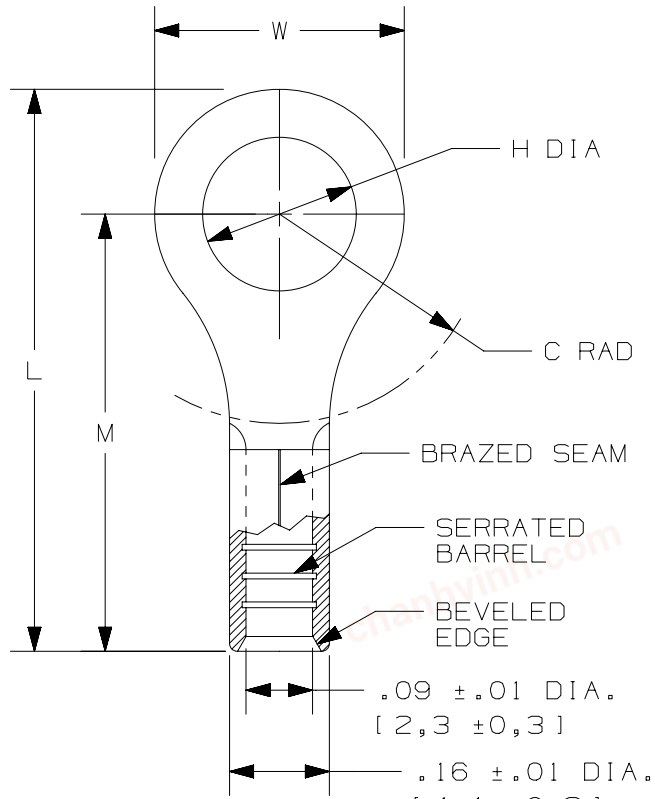


NOTES:
1. USED FOR:
   A. #18-14 AWG [1,0-2,5 mm²] SOLID OR STRANDED COPPER WIRE
   B. 302°F [150°C] MAX. OPERATING TEMPERATURE
2. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED: CT-100A, CT-200, CT-600A (CT-570CH), CT-1570, CT-2500 (CT-2570CH)
   B. PANDUIT APPROVED: CT-160, CT-260
3. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]
4. MATERIAL:
   A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
7. * INDICATES NOT UL LISTED

LISTED 587H E52164

CERTIFIED LR31212

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 10 | 07-08-25 | USR 094325 | USR 094325 | JSUN | UPDATED TITLE FROM #16-14 TO #18-14<br>ADDED NOTE 7 | 016810 |
| 08 | 09.17.12 | JBN | LCA | VMB | ADDED METRIC EQUIVALENT. REVISED NOTES.<br>UPDATED TO CURRENT STANDARDS. | A41264 |

TITLE: RING TONGUE, NON-INSULATED, #18-14

CUSTOMER DRAWING

ITEM REVISION NAME: N41264BA/10

DATASET FILE NAME: N41264BA/10

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.13]
.xx ± .01 [.25] ANGLES ± 5°
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41264

| DRAWN BY | DATE | CHK | SCALE | SHEET | SIZE |
|---|---|---|---|---|---|
| DAW | - | RLS | N.T.S. | SHEET 1 OF 1 | A |

D10100DA/12