
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	RECOMMENDED FASTENER	A	B	C	D +.015 (+.38) -.005 (-.13)	E	F	G (REF)	H (REF)	I (REF)	USE WITH CABLE TIE CROSS SECTIONS	WEIGHT 100 pcs lbs (g)
TM2S8-71	#8 (M4) SCREW	.636 (16.2)	.427 (10.8)	.278 (7.1)	.215 (5.5)	.063 (1.6)	.158 (4.0)	.110 (2.8)	.335 (8.5)	.184 (4.7)	MINIATURE INTERMEDIATE STANDARD	.13 (60)

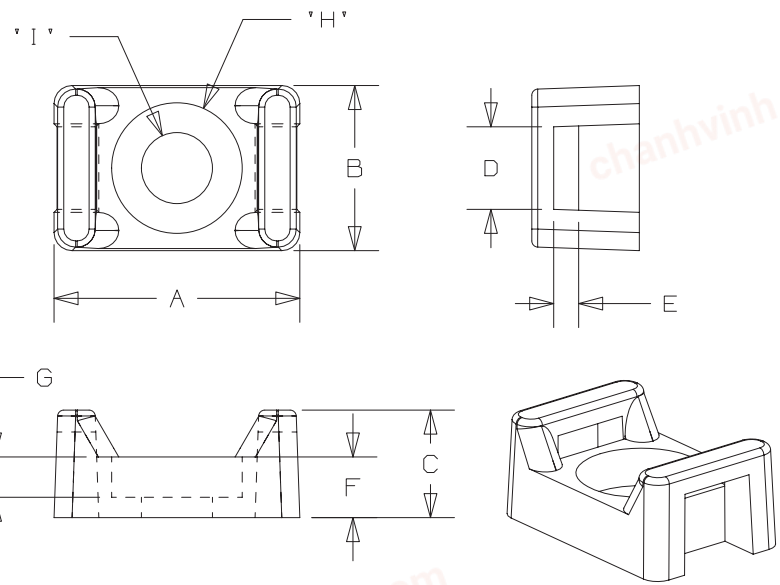

A

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. COUNTERBORE HOLE TO PROVIDE LESS OF AN OBSTRUCTION TO THE BUNDLE.
3. UNIQUE CRADLE DESIGN PROVIDES MAXIMUM STABILITY AND RIGIDITY TO THE WIRE BUNDLE.
4. MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING [MECHANICAL WITHOUT IMPACT] OF 464°F (240°C).
5. EXCELLENT RESISTANCE TO MOST CHEMICALS.

B

TITLE

TM2 TIE MOUNTS
PEEK SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: W10001DV/01

DATASET FILE NAME: W10001DV/01

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.5] .XXX ± .020 [.5]
.XX ± .02 [.5] ANGLES ± 5 °

THIRD ANGLE PROJECTION

PANDUIT

MATERIAL:
PEEK
COLOR: -71 BROWN

DRAWING NUMBER: SS-27629

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
BWG	02/10/10	MPH	NONE		A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	11/21/24	MSAN	RMHI	DJSL	B. UPDATED TITLE BLOCK TO CURRENT STANDARD. A. REVISED NOTES 4 AND 5.	WCECN00546/01
R	02/10/10	BWG	MPH		DRAWING RELEASED	SS-27629 R

D10100DA/20