chanhvinh.com

Outdoor
5G/4G Direct Mount Salt Shaker Monopole Antenna
LPT600/71NMO and LPT600/71NMOW – 617 to 7125 MHz

Pulse
a YAGEO company





Applications:

- *WiFi 6E, 4G/5G FR1*
- *Includes Band 71 (617-698MHz) and CBRS Bands 42 and 48 (3.4-3.7GHz)*
- *Utility boxes*
- *Smart metering*
- *IoT Devices*

Electrical specifications @ 25° C – Operating Temperatures – 40°C to +85°C					
Frequency Bands – 617-960/1710-2700/3300-4200/4400-5000/5150-5925/6000-7125 MHz					
Antenna type[2]	**Nominal Impedance**	**Polarization**	**Radiation pattern**	**Power withstanding**	**DC Ground**
Monopole	50Ω	Vertical	Omni	60W	No

Frequency (MHz)	**617-960**	**1710-2700**	**3300-4200**	**4400-5000**	**5150-5925**	**6000-7125**
VSWR	3:1	2.5:1	2.5:1	2.5:1	2.5:1	2.5:1
Average Peak Gain (dBi)	1.8	4.4	4.2	4.8	4.6	5.5
Average Efficiency (%)	78	77	65	58	65	58
HPBW Vertical Plane (°)	65	43	30	25	26	24


Mechanical Specifications				
Orderable PN: LPT600/71NMO or LPT600/71NMOW[3]				
Size (Diameter x Height)	**Color**	**Weight**	**Connector Type**	**Fixing System[4]**
40.9 (1.61”) x 95.9 (3.77”) mm	Black or White	85grms (0.19lbs)	NMO (Pogo)	NMO Mount
Housing Material	**Ingress Protection**	**RoHS-6 Compliant**		
PET+PC, UV rated	IP67	Yes		


Notes:
1. Storage Temperature: -40°C to 85°C
2. Measured on 305mm (12”) SQ ground plane
3. LPT600/71NMO comes in black, for white add the suffix W and PN becomes LPT600/71NMOW
4. Pulse Larsen NMOKHF with Center Pin 070-06403.001. Best performance with LMR-195 (or equiv.) or better


chanhvinh.com


Mechanical Drawing


LPT600/71NMO (W)

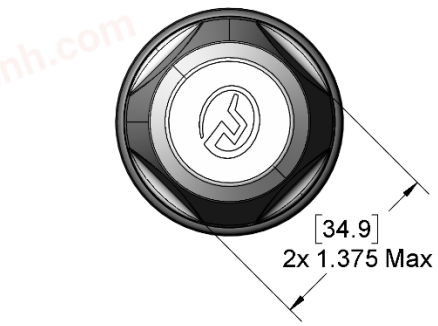

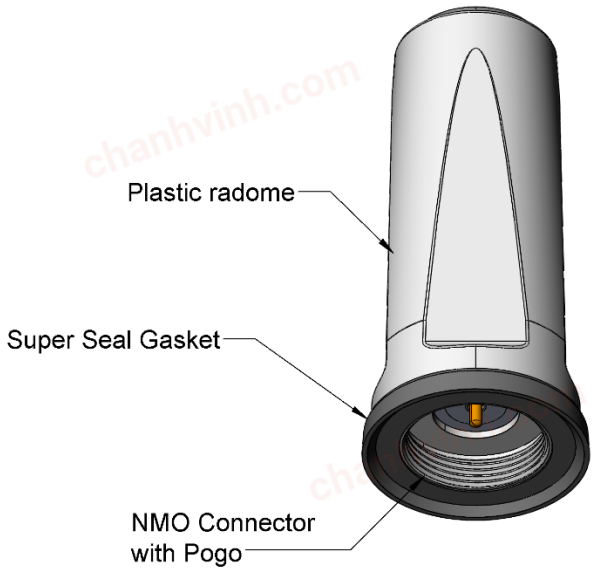

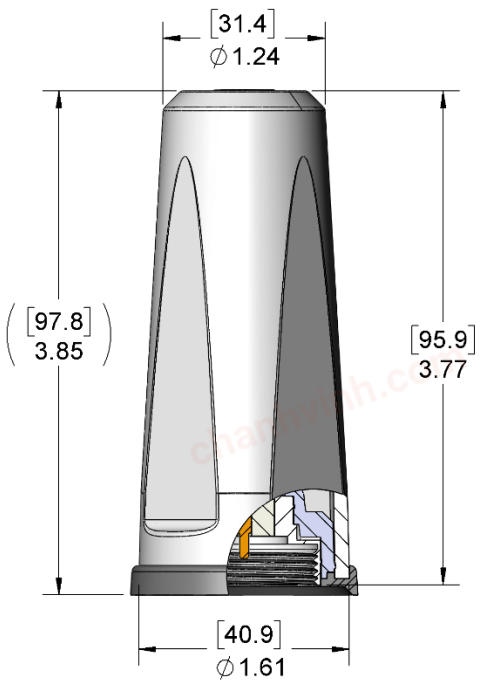

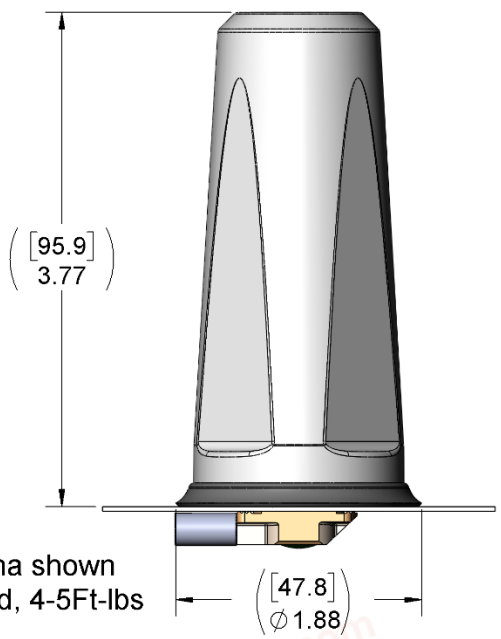

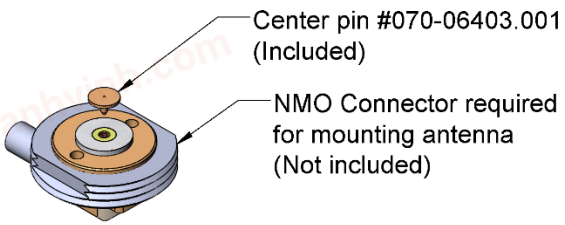


Dimensions: Inches (mm)
Unless otherwise specified, all tolerances are ±.010 (0.25mm)

chanhvinh.com

Test Setup


LPT600/71NMO (W)

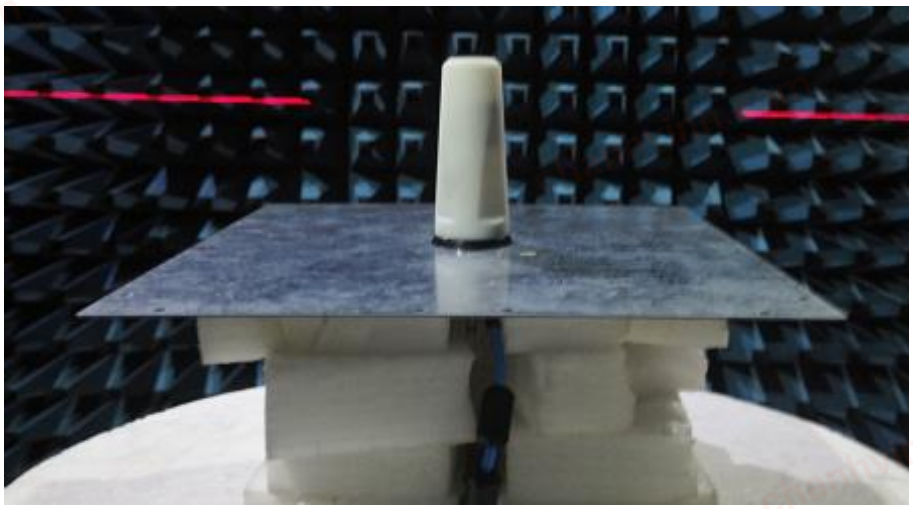

LPT600/71NMO (W) antenna sample measured on 12'' (305mm) SQ ground plane.

Charts- VSWR


LPT600/71NMO (W)

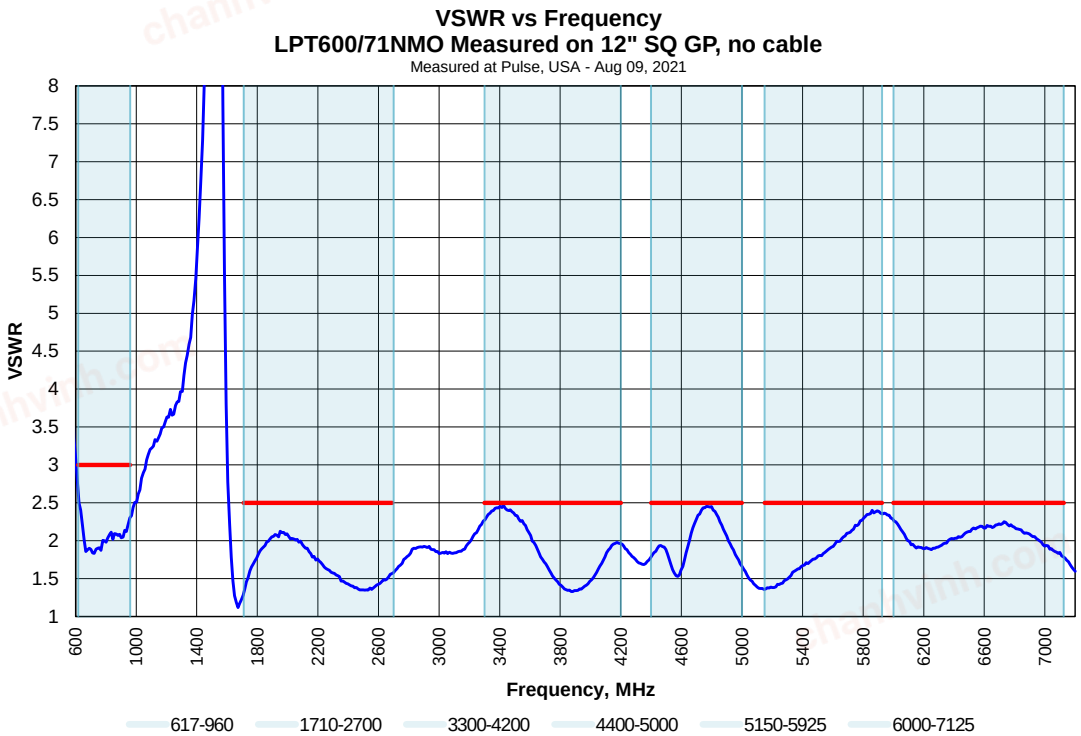


chanhvinh.com

Charts- Peak Gain and Efficiency

LPT600/71NMO (W)

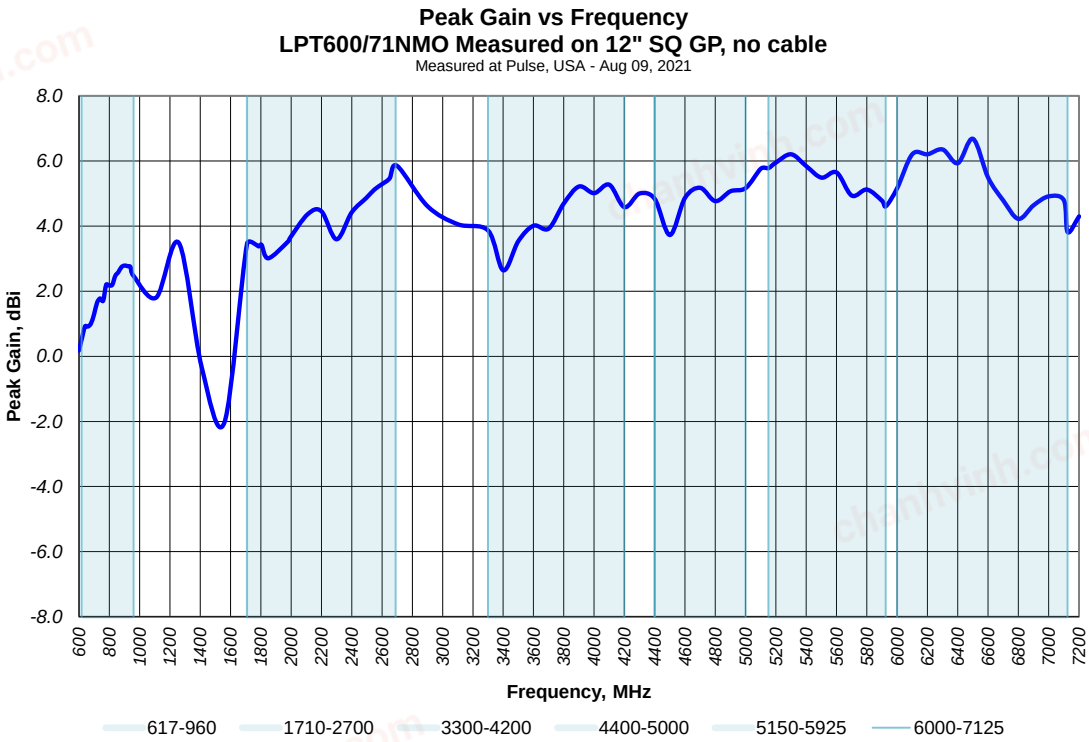

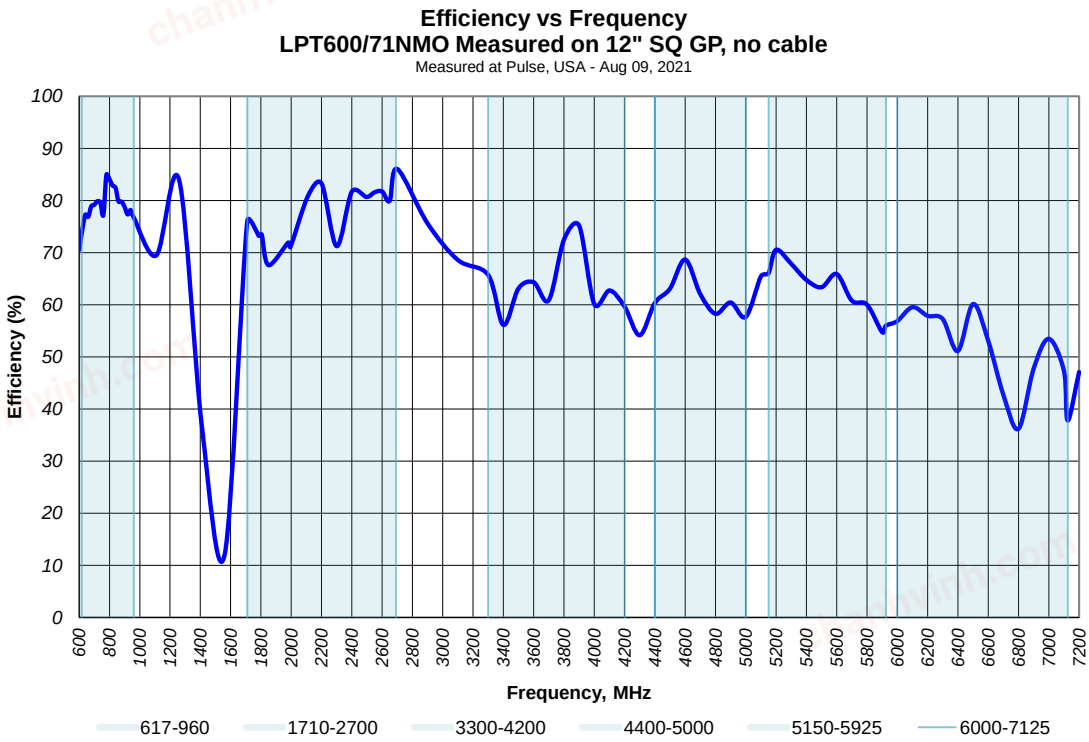


chanhvinh.com


Outdoor
5G/4G Direct Mount Salt Shaker Monopole Antenna
LPT600/71NMO and LPT600/71NMOW – 617 to 7125 MHz


Pulse a YAGEO company


Charts- XY Gain Plots


LPT600/71NMO (W)

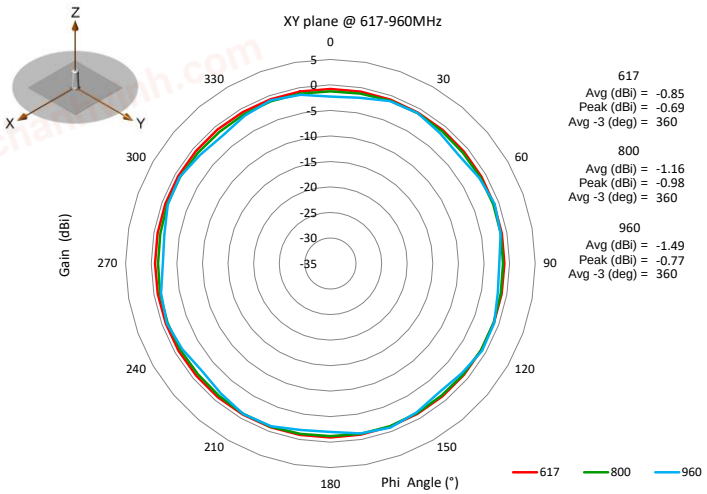


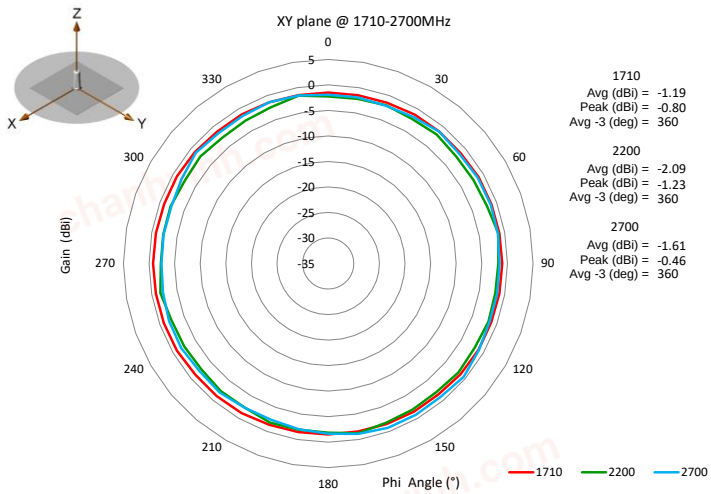

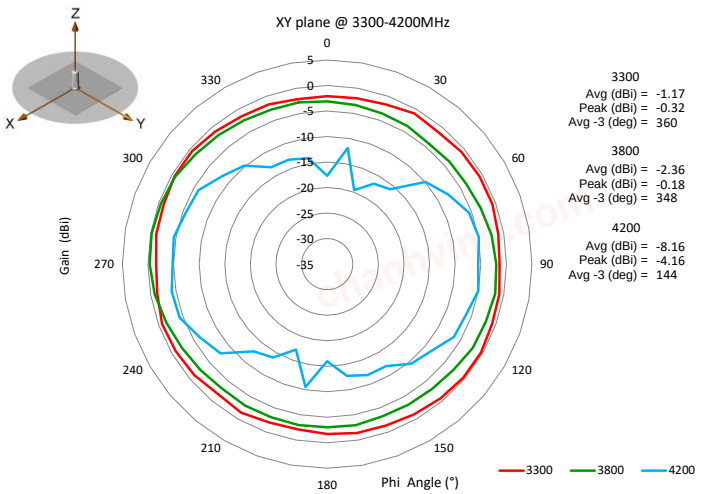

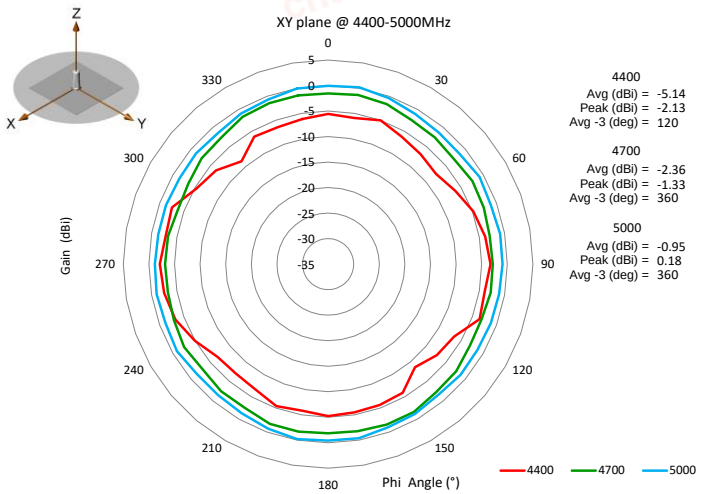

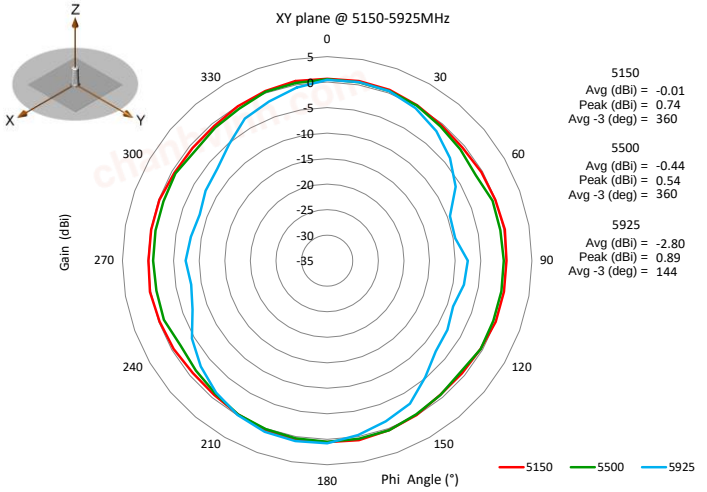

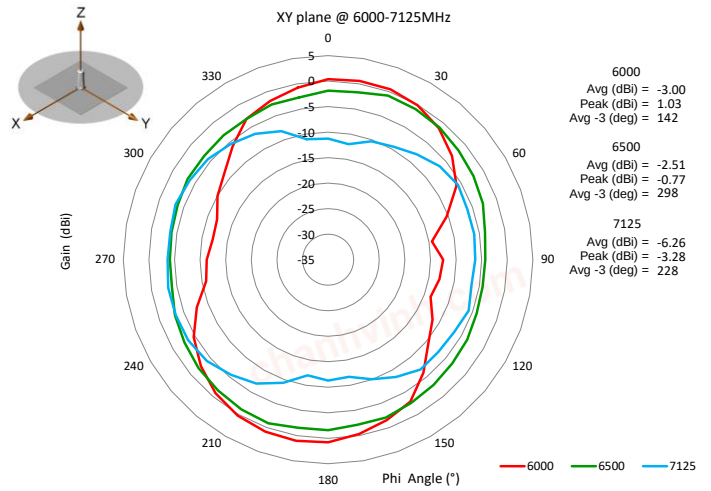


chanhvinh.com


Outdoor
5G/4G Direct Mount Salt Shaker Monopole Antenna
LPT600/71NMO and LPT600/71NMOW – 617 to 7125 MHz


Pulse a YAGEO company


Charts – XZ Gain Plots


LPT600/71NMO (W)

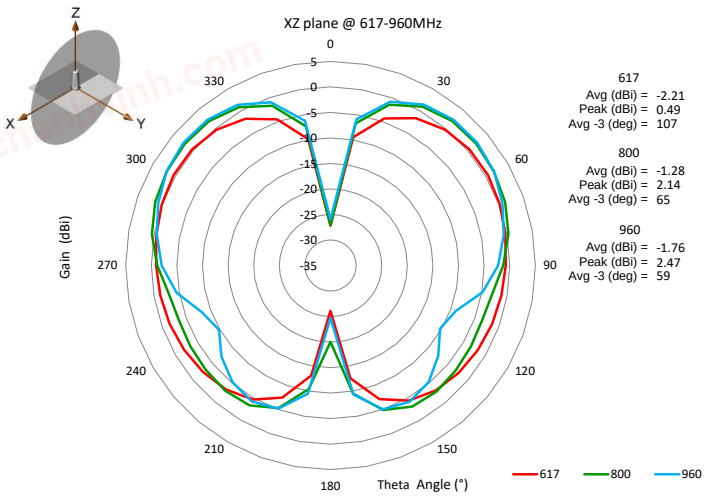


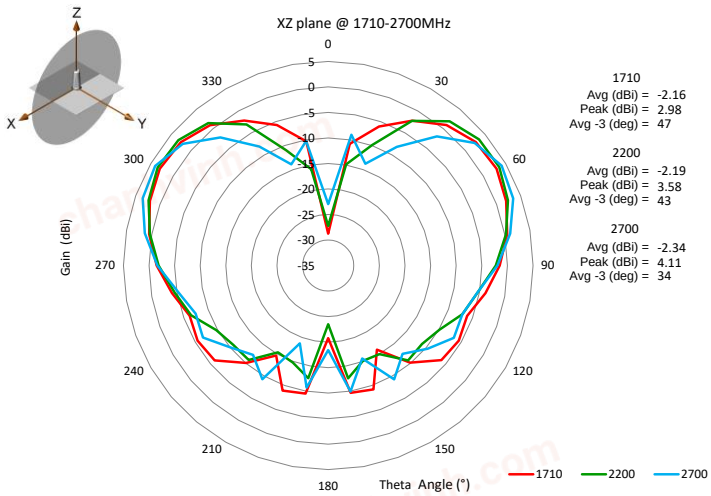

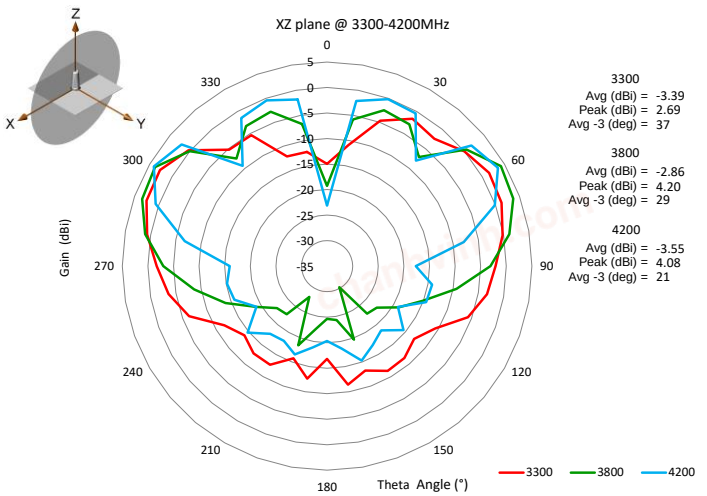

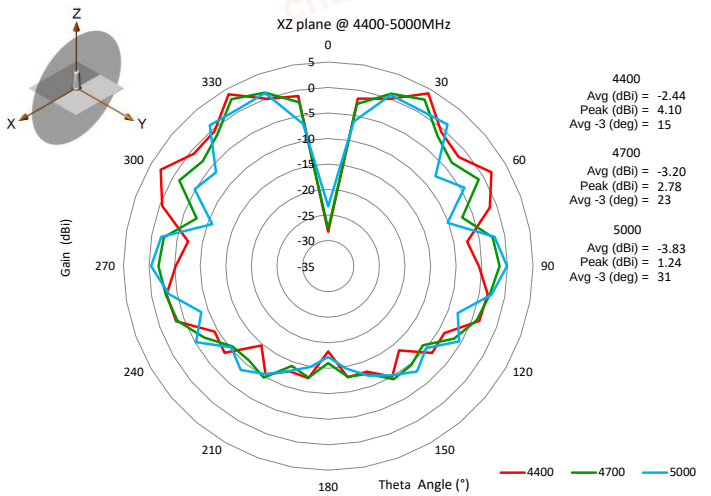

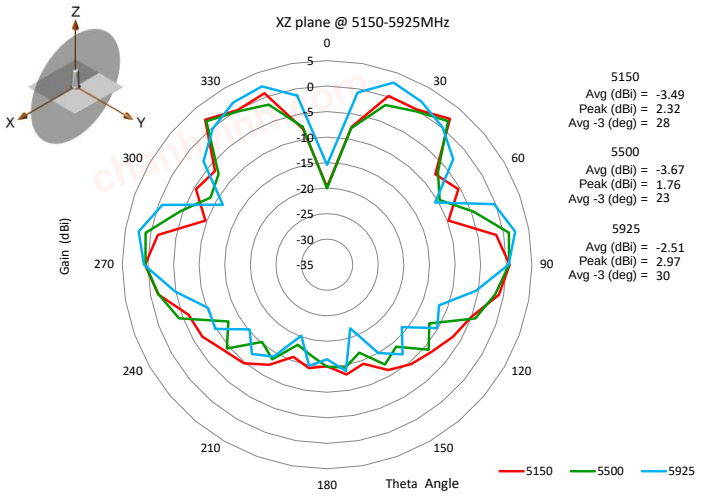

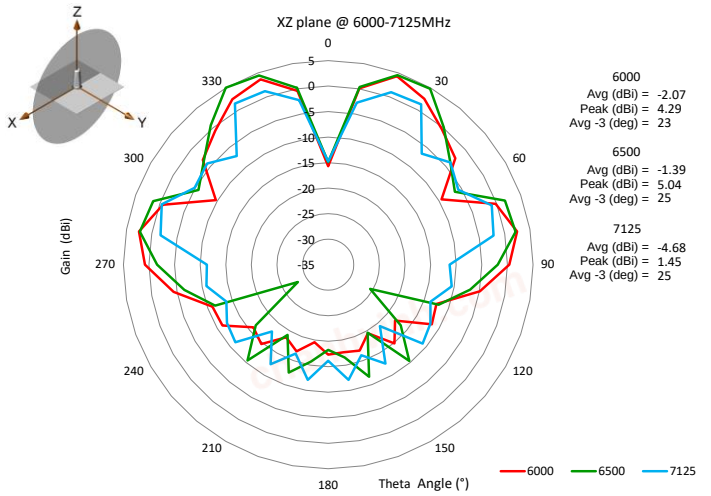

chanhvinh.com

Packaging

LPT600/71NMO (W)

Packaging info:
1 antenna packed in a plastic bag.
1 label on each plastic bag with part number, description, date code.

Additional Product Info

LPT600/71NMO (W)

Family Products – LPT (Low Profile Transit)			
5G / 4G LPT Products			
Orderable PN	Connector Type	DC Ground (DCG)	Color
LPT600/71DMN (or LPT600/71DMNW)	N-Female	No	Black (or White)
LPTDCG600/71DMN (or LPTDCG600/71DMNW)	N-Female	Yes	Black (or White)
LPTNGP600/71DMN (or LPTNGP600/71DMNW)[1]	N-Female	No	Black (or White)
LPTNGPDC600/71DMN (or LPTNGPDC600/71DMNW)[1]	N-Female	Yes	Black (or White)
LPT600/71NM (or LPT600/71NMW)	N-Male	No	Black (or White)
LPTDCG600/71NM (or LPTDCG600/71NMW)	N-Male	Yes	Black (or White)
LPT600/71NMO (or LPT600/71NMOW)	NMO-Pogo	No	Black (or White)
LPTDCG600/71NMO (or LPTDCG600/71NMOW)	NMO-Pogo	Yes	Black (or White)

Notes:
1. ‘NGP’ stands for ‘No Ground Plane’. LPTNGP600/71DMN or LPTNGP600/71DMNW is a ground independent antenna. Antenna was tuned without a ground plane.
2. Please contact sales for availability, lead time, and/or any special requests. Samples available upon request.

For More Information:
Americas - antennas.us@pulseelectronics.com | Europe – antennas.eu@pulseelectronics.com | Asia – antennas.as@pulseelectronics.com | Questions? +1-800-ANTENNA
Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved.