
chanhvinh.com

Expertise – Passion – Automation

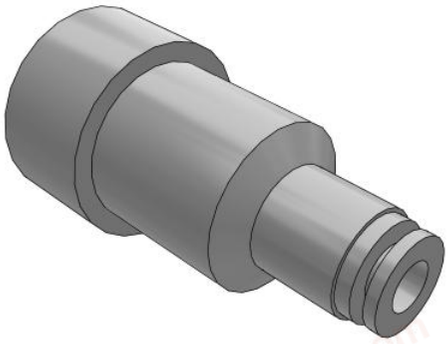

KK130S-*H, S-Couplers, Straight Type with One-touch Fitting

KK130S-06H

Datasheet

General series information

- Straight Type with One-touch Fitting.
- Applicable Tubing O.D.: ø6, ø8, ø10, ø12, ø1/4, ø5/16, ø3/8, ø1/2.

Standard specifications


Type	S (Socket)
Applicable Tubing O.D.	ø6 mm
Pressure medium	Air
Maximum operating pressure	1.5 MPa
Minimum operating pressure	0 MPa
Proof pressure	2 MPa
Maximum ambient temperature	80 °C
Minimum ambient temperature	-20 °C (No freezing)
Sealing principle	Male thread with sealant
Plating	Sleeve: Electroless nickel plated Other external metal parts: Zinc chromated
Weight	0.072 Kg

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Dimensions

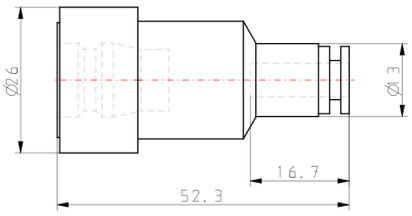

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Additional information

Catalogue KK130-B_EU.pdf

chanhvinh.com

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es