chanhvinh.com



91 Draw Latch

Under-center · Adjustable

- **Adjustable grip**
- **Kick out feature disengages from keeper**
- **Secondary catch option to prevent accidental opening**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Maximum working load:
With 91-600 keeper:
1325 N (300 lbf)


With K4-2338 keeper:
1550 N (350 lbf)

Installation Notes


M4 (No. 8) screws (not supplied)

Latch

Exposed Base (Secondary catch option shown)

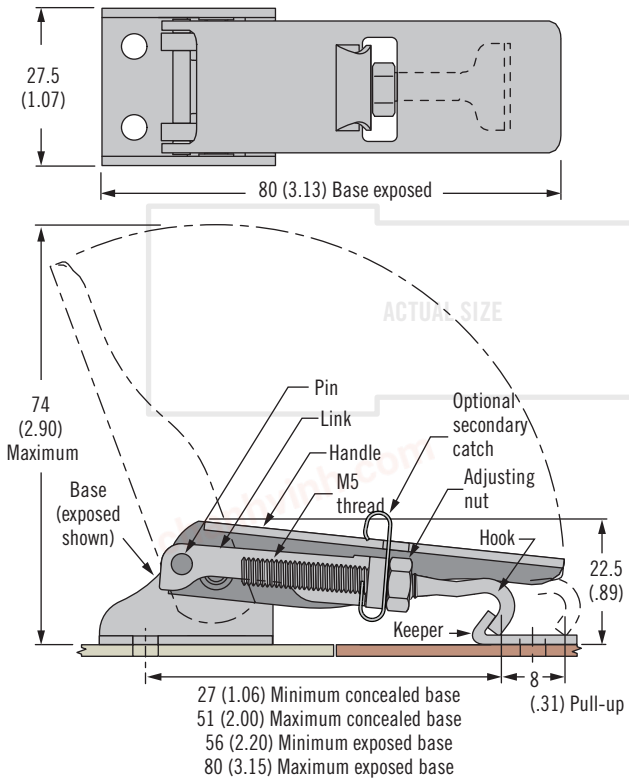

Concealed Base (Hasp option shown)

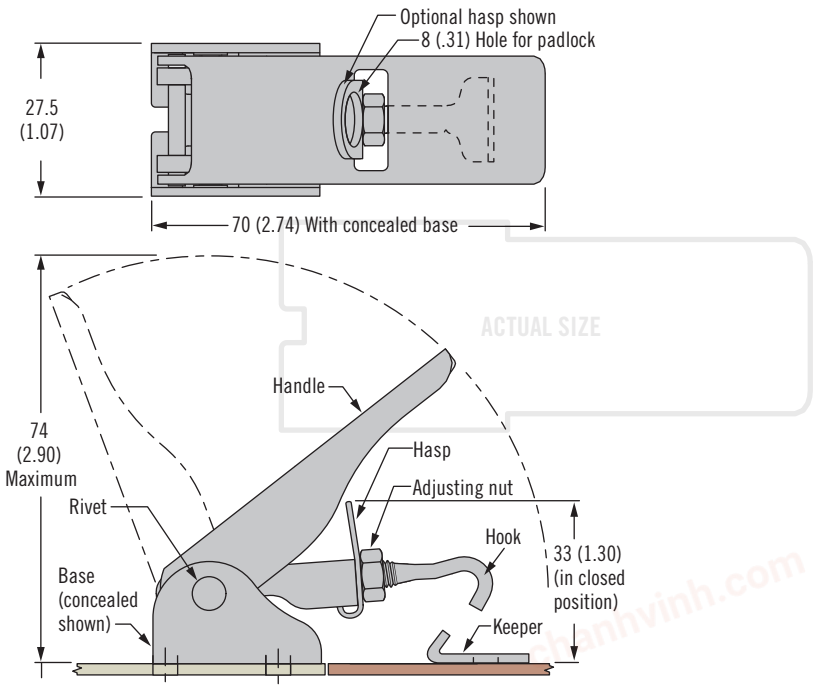


Dimensions in millimeters (inch) unless otherwise stated

southco®


chanhvinh.com

Keepers


Concealed

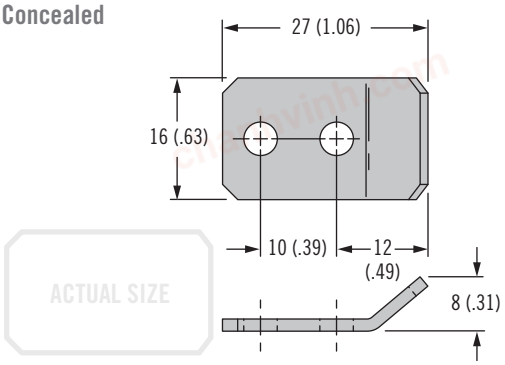


Exposed

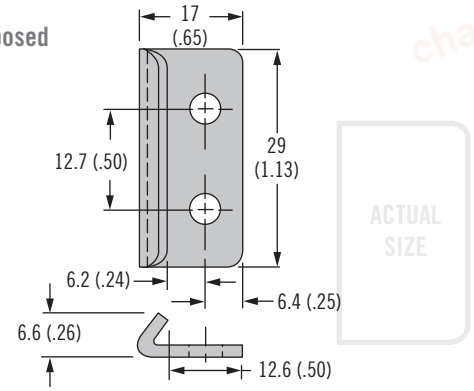


Exposed Base and Concealed Keeper

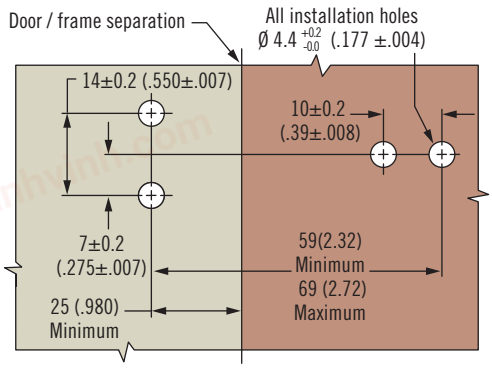


Exposed Base and Exposed Keeper

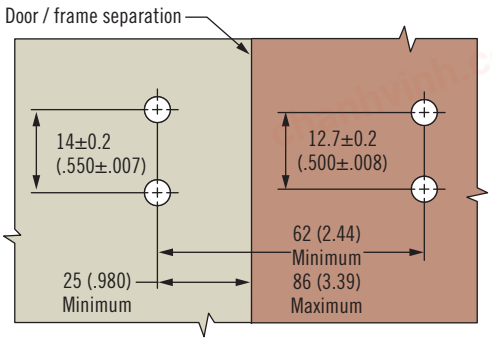

Concealed Base and Concealed Keeper

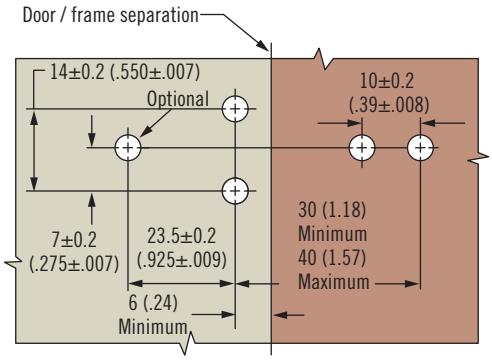

Concealed Base and Exposed Keeper

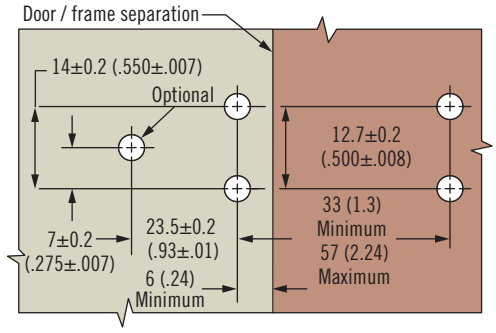

B Base type

1 Concealed
2 Concealed with secondary catch
3 Concealed with padlock hasp
5 Exposed
6 Exposed with secondary catch
7 Exposed with padlock hasp

91 - 5 B 2- F

F Finish

07 Steel, zinc plated
52 Stainless steel

Finish	Keeper Part Number	
	Concealed	Exposed
Steel	91-600-07	K4-2338-07
Stainless Steel	91-600-52	K4-2338-52
Stainless Steel, Black	91-600-63	K4-2338-63

Part Number Selection

Order latch and keeper separately
For latch part number see builder
For keeper part number see table

Dimensions in millimeters (inch) unless otherwise stated

INFO CLIC www.southco.com/91

chanhvinh.com



91 Draw Latch

Under-center · Adjustable

- **Adjustable grip**
- **Secondary catch option to prevent accidental opening**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Maximum working load

Stainless steel: 710 N (160 lbf)


Steel, zinc plated: 1200 N (270 lbf)

Installation Notes

Ø 2.5 (No. 3) screws (not supplied)


Latch

Standard

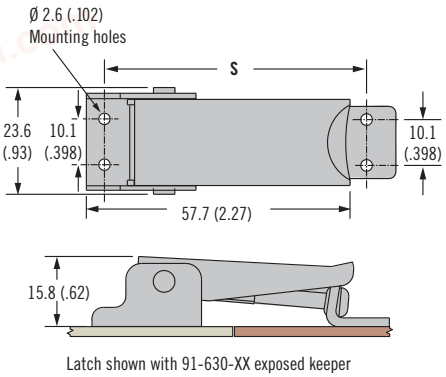

Latch shown with 91-630-XX exposed keeper


Secondary Catch

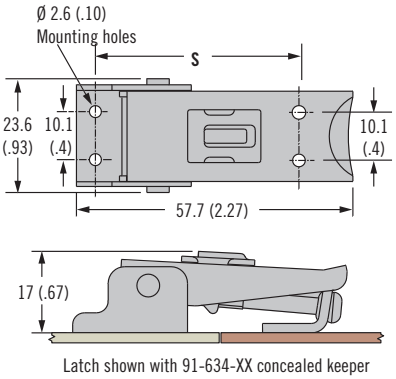


Latch shown with 91-634-XX concealed keeper


Keeper

Exposed

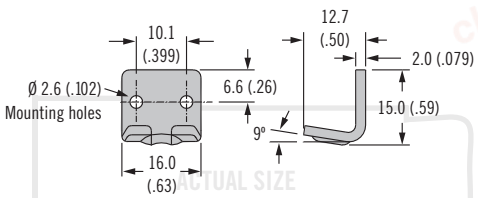

Concealed

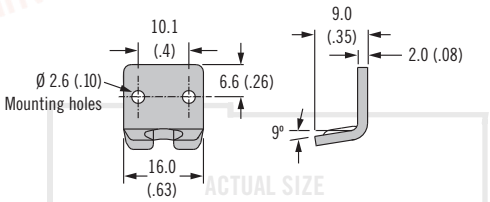

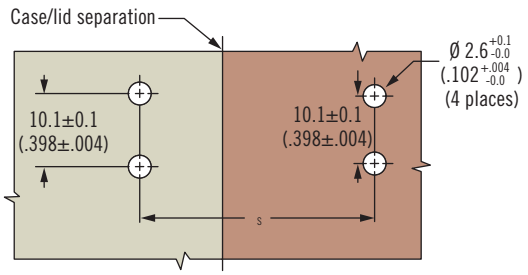

Part Number

See table

Order latch and keeper separately

Material	Latch Part Number	
	Standard	Secondary Catch
Steel	91-351-07	91-361-07
Stainless Steel	91-351-52	91-361-52

S	Keeper Type		
		Steel	Stainless Steel
39 - 47 (1.53 - 1.85)	Concealed	91-634-07	91-634-52
52 - 60 (2.04 - 2.36)	Exposed	91-630-07	91-630-52


Dimensions in millimeters (inch) unless otherwise stated


www.southco.com/91

chanhvinh.com

91 Draw Latch

Under-center · Adjustable



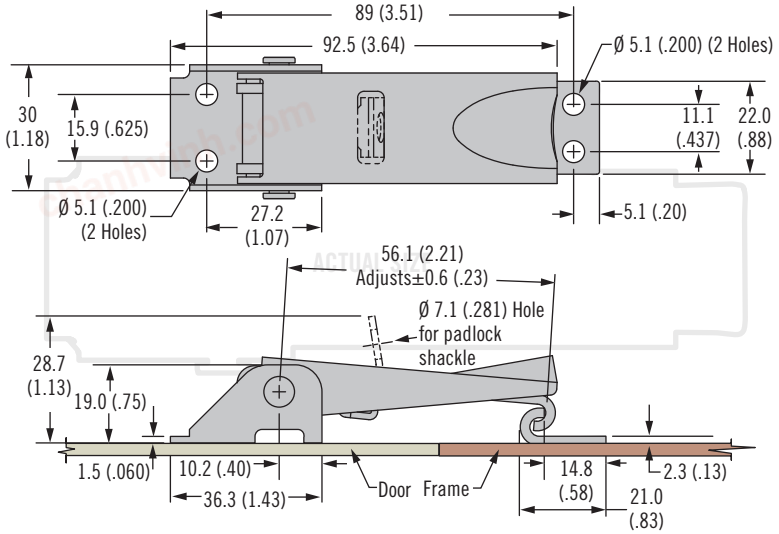

Type	Part Number	
	Steel	Stainless Steel
Standard Latch	91-752-07	91-752-52
Latch with Padlock Hasp	91-772-07	91-772-52

- **Adjustable grip**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Maximum working load:
2670 N (600 lbf)

Installation Notes

M5 (No. 10) screws (not supplied)

Part Number


See table

Assembly complete with keeper

91 Draw Latch

Under-center · Adjustable



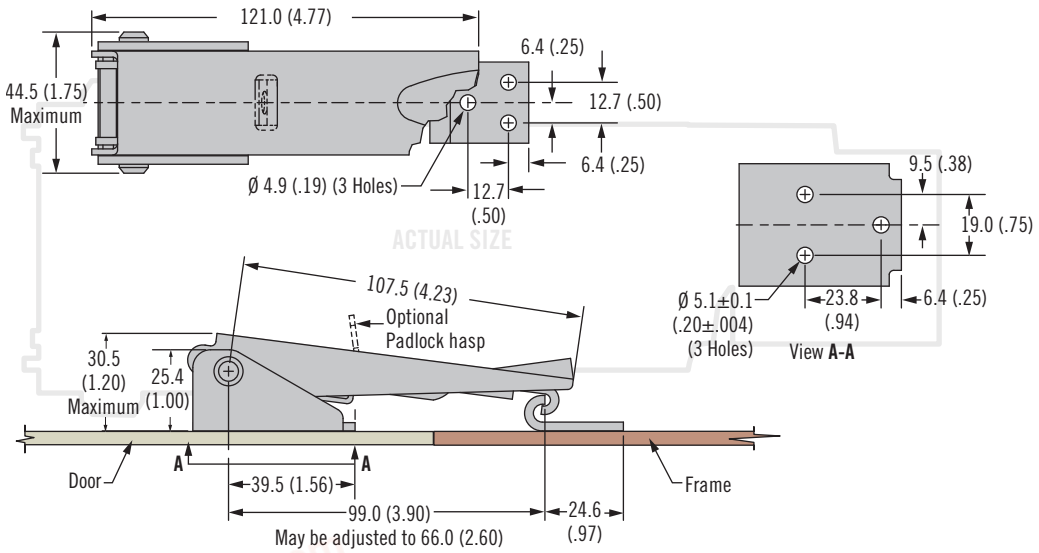

Type	Part Number
Standard Latch	91-812-52
Latch with Padlock Hasp	91-832-52

- **Adjustable grip**

Material and Finish

Stainless steel

Performance Details

Maximum working load:
3560 N (800 lbf)

Installation Notes

Install assembly with M4 (No. 10) screws (not supplied)

Part Number

See table

Assembly complete with keeper